

STONIMAGE

How to be A Global Leader in Services?

Many of us are facing after-sales trouble no matter private or governmental control company, time is invaluable and most worrying for us. Once the machine shut down, the production shut down either, and we start to lose money quickly and come to an operation crisis So what we do here?

- ◆ Fast Action in Services
- ◆ Unconditional Parts Supply
- ◆ Strong Professionalism
- ◆ Spotless Satisfaction

This is how STONIMAGE started to make business. What we do is giving the fastest services after supplying high-quality level products.

XINXIANG STONIMAGE TECHNOLOGY CO. LTD

新乡市石像科技有限公司

Email: inquire@stonimage.com

Tel: +86 373 5853611 +86 173 3736 9213

www.stonimagelift.com

Add: 1522#, Gongyuanguoji, Hongqi district, Xinxiang city, Henan, China

STONIMAGE

was founded at end of 2014, is a global brand and manufacturer of lifting equipment and material handling equipment, we owns the most professional engineering team, R & D center and manufacturing base with rich experience in lifting industry. We are working with full passion in continuous innovation and improving services level.

Currently, STONIMAGE is focusing on Innovation, Manufacturing and Supplying of various lifting equipment, transportation machinery and construction machinery, mainly as below:

- Ladder Lift, Solar Panel Lift, Glass and window lift, Glass trolley
- Cargo truck elevator, Fish elevator, Mountain cargo Lift
- Electric scaffold, Wall building platform
- Electric forklift, Brick stacker, Installation Forklift for Pipe/Panel
- Scissor lift, Retractable stairs, Belt conveyor
- Restaurant Meal elevator



- **Aerial Ladder Lift**
- ✓ For Solar panel
- ✓ For Glass/window/door
- ✓ For Construction material



- **Cargo Truck Loader**
- **Fish Truck Loader**


Electric Scaffold

- ✓ Max. Lifting Capacity: 300kg / 500kg
- ✓ Lifting height: 2~8m
- ✓ For Man working

- Height 2m to 2.5m



- Height 3m to 8m (with outrigger)

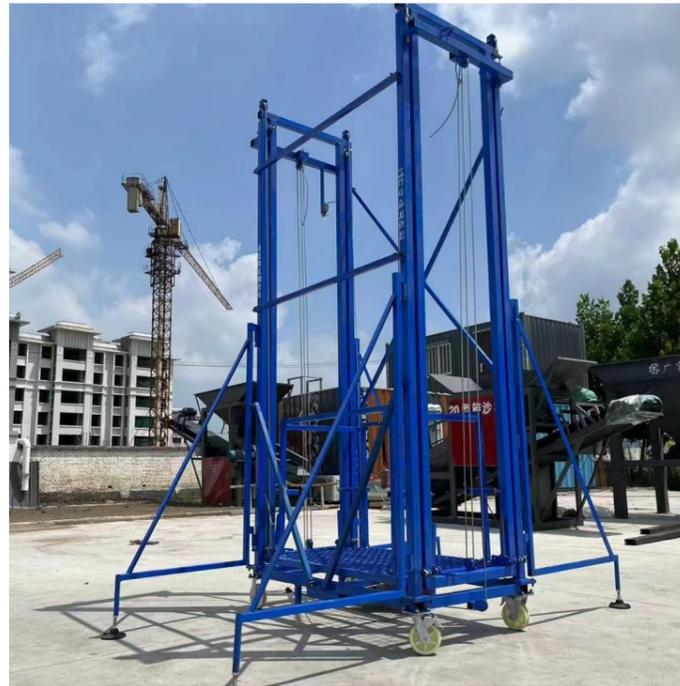

Technical Data

Platform Height (m)	Max. Lifting Capacity (kg)	Platform size (m)	Dimension (m)	Overall Height (m)	Outrigger & Guardrail	Material
2	300/500	1.3*0.68	1.5*0.7	2.7	-	5*5cm steel pipe, 2cm thickness
2.5	300/500	1.3*0.68	1.5*0.7	3.2	-	5*5cm steel pipe, 2cm thickness
3	300/500	1.3*0.68	1.5*0.7	3.7	Yes	5*5cm steel pipe, 2cm thickness
3.5	300/500	1.3*0.68	1.5*0.7	4.2	Yes	5*5cm steel pipe, 2cm thickness
4	300/500	1.4*0.78	1.6*0.8	4.7	Yes	5*5cm steel pipe, 2cm thickness
4.5	300/500	1.4*0.78	1.6*0.8	5.2	Yes	5*5cm steel pipe, 2cm thickness
5	300/500	1.4*0.78	1.6*0.8	5.7	Yes	5*5cm steel pipe, 2cm thickness
5.5	300/500	1.4*0.78	1.6*0.8	6.2	Yes	5*5cm steel pipe, 2cm thickness
6	500	1.6*0.98	1.8*1	6.7	Yes	6*6cm steel pipe, 2cm thickness
7	500	1.6*0.98	1.8*1	7.7	Yes	6*6cm steel pipe, 2cm thickness
8	500	1.6*0.98	1.8*1	8.7	Yes	6*6cm steel pipe, 2cm thickness

Technical Notes:

- 1) Motor size: PA800/ PA1000
- 2) Platform material: Iron plate
- 3) Wire Rope diameter: 6mm
- 4) Castor diameter: 6 inches, two directional wheels, two universal wheels, with brakes
- 5) Limiter: Upper and lower limiter
- 6) The scaffold can stick out for two or three sections, the height/ weight/ price is different.

Application 应用案例

